



DSD-1 Cut Sheet



Features

- LCD Display, Easy Operation
- Seamless Connection with Hydro-X
- Multiple purposes assignment
- Plug & Play

Overview

The Trolmaster DSD-1 Dry-contact module provides a simple and flexible solution to who want to connect & control devices to the Hydro-X using a “dry-contact” or relay to activate the device. Some equipment requires either normally open or normally closed contact closure in order to activate the equipment. The DSD-1 is the product that you need to control those types of devices. *

The DSD-1 can be configured to work as the other Trolmaster power modules work. The DSD-1 connects into the “devices” line on the Hydro-X and can be set to control an almost infinite number and types of devices such as:

Lighting contactors; Light Deprivation curtains; Pump contactors; Temperature devices; Humidity devices; CO2 devices

* Consult Trolmaster for questions concerning your particular device.

M Product Specifications

Dimensional Diagram

Package Content

- 1 x Dry Contact Station DSD-1
- 1 x 16ft RJ12 Cable
- 1 x 4ft RJ12 Cable
- 1 x RJ12 T-Splitter

Input Voltage

100~240 VAC, 50/60Hz

DC Output

12V 0.2A

Dry Contact Output

30VDC/250VAC,6A

Working Environment


Temperature 32-122°F, Humidity<90%

Packaging Dimensions

85mm(L) x 80mm(W) x 90mm(H)

G.W. per pack

0.34kgs

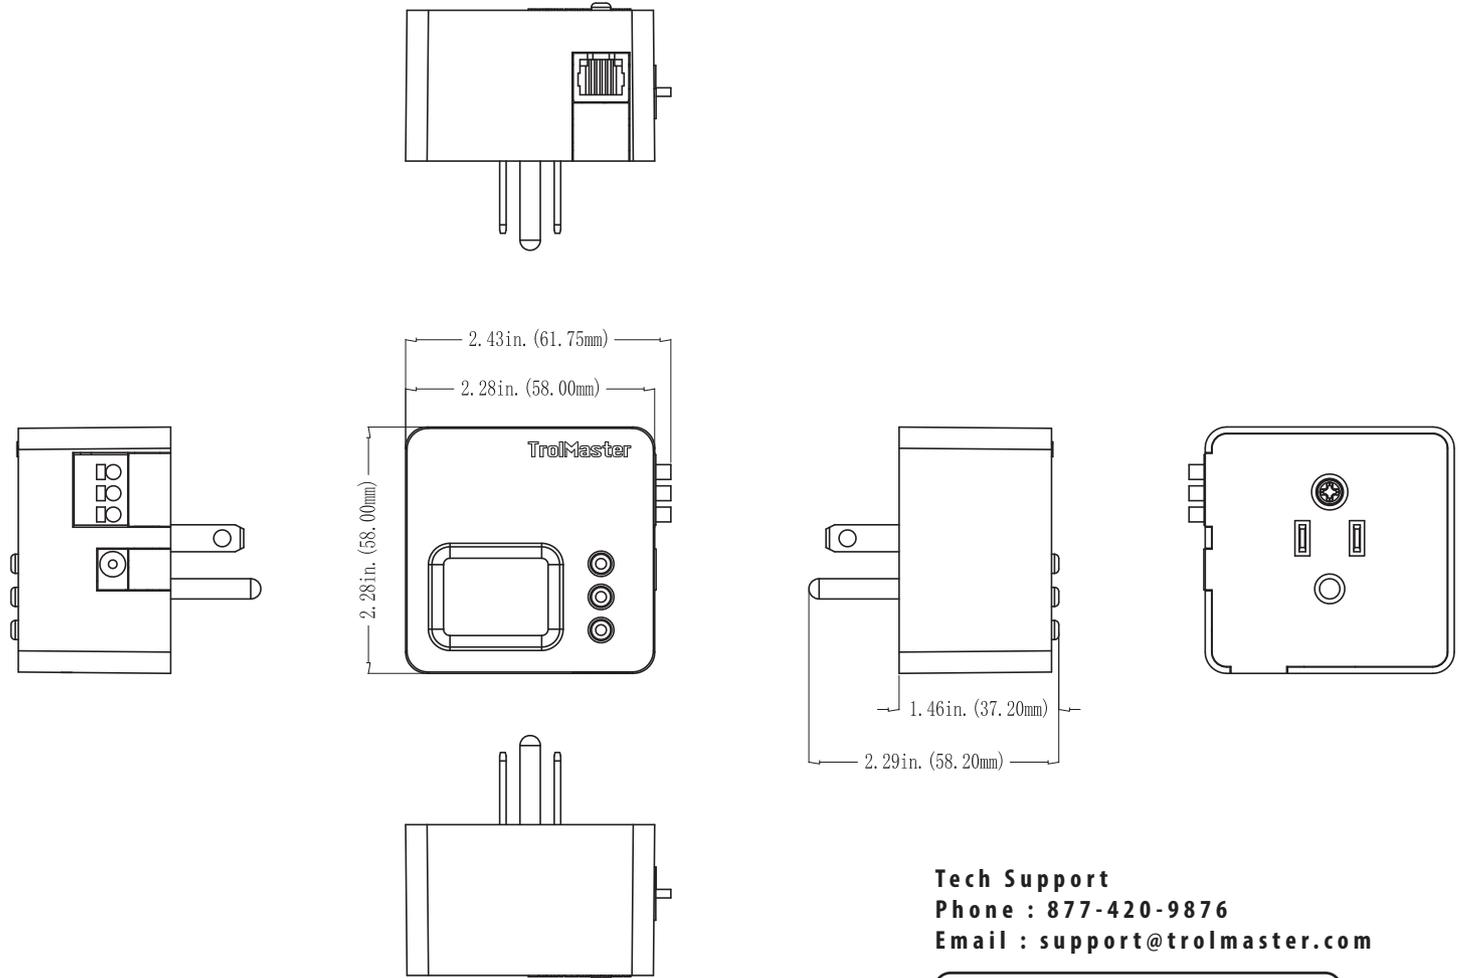

Tech Support

Phone : 877-420-9876

Email : support@trolmaster.com



CONFORMS TO
UL STD.61010-1
CERTIFIED TO CSA STD.
C22.2#61010-1