


 THE


MATRX 730F

The Matrx 730F is a commercial-grade folding fixture designed with a full spectrum for use with any crop, lower ceiling spaces, and vertical racking installations.

FIXTURE **DIMENSIONS**

1100mm(43.3") * 1051mm(41.4") * 78mm(3")



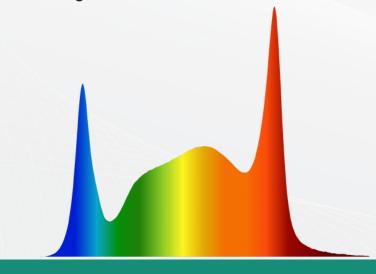

THE **SPECTRUM**

The XR Spectrum provides a very balanced red and blue light for a full spectrum with more efficiency than our original spectrum. Ideal for vegetative and flowering stages, this spectrum boosts trichome production, enhancing crop quality.



DLC

FIXTURE **HIGHLIGHTS**

MODEL	M730F
EFFICACY(400-800nm)	3.07 µmol/J
PHOTON FLUX (400-800nm)	2,235 µmol/s
POWER	726.3 W
VOLTAGE RANGE	100-480 V

THE

MATRX 730F

FIXTURE SPECIFICATIONS

FULL MODEL NAME

HIGH VOLTAGE RANGE

LOW VOLTAGE RANGE

LIFETIME

LED OPTICS

DIMMABLE

FIXTURE POWER

POWER FACTOR

FREQUENCY

THD @ 100% POWER

COVERAGE AREA

WARRANTY PERIOD

DAMP LOCATIONS

DRIVER (Fixture Mounted)

Matrx 730F

200 - 480V

100 - 277V

L90 > 43,000hrs

120° Primary Optics

0-10V Daisy-Chainable RJ-12

726.3W

0.974

50/60Hz

12.9%

5X5

5 Years

IP65

uPowerTek











LET'S CONNECT



1-844-472-3389



sales@aeliusled.com



aeliusled.com @aeliusled


INCLUDED IN BOX

LED Fixture LED Driver Power Cord

Daisy-Chain Data Cord 120V Adapter

Dimmer (If Applicable) Aircraft Cable Hangers

Rope Hangers



WHAT'S ABOVE YOUR PLANTS?